


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~	LJC 05/14/07
J	DRAWING UPDATE	JLZ 11/23/17'	~	



NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057 - X X X X X-X


Packing Specifications
30.5: 30.5m/reel
61.0: 61.0m/reel(For Dark Grey Only)
76.5: 76.5m/reel
153.0: 153m/reel
457.0: 457m/reel

Edge mark
R: Red mark
F: Flower mark



Wire diameter
1: φ0.100 (30AWG)
2: φ0.127 (28AWG)
3: φ0.090 (SPECIAL)

Wire AWG
28: 28AWG
30: 30AWG
T: SPECIAL
Cable color
A: Gray
S: Dark Grey

No. Of positions
06: 6pin
64: 64pin



Number	Dimensions			Max. conductor resistance DC 20°C Ω/m	
	TP(mm)	W(mm)	Tolerance		
06	6.35	7.62	±0.30	φ0.100<0.397	
08	8.89	10.16	±0.30		
10	11.43	12.70	±0.30		
14	16.51	17.78	±0.30		
16	19.05	20.32	±0.30		
20	24.13	25.40	±0.30		
24	29.21	30.48	±0.30		
26	31.75	33.02	±0.30		
30	36.83	38.10	±0.30		φ0.127<0.237
34	41.91	43.18	±0.40		
40	49.53	50.80	±0.40		
50	62.23	63.50	±0.40		
60	74.93	76.20	±0.40		
64	80.01	81.28	±0.40		

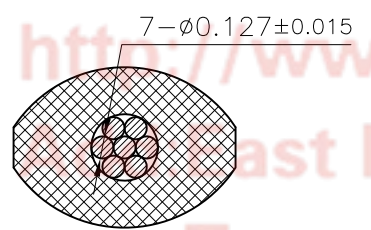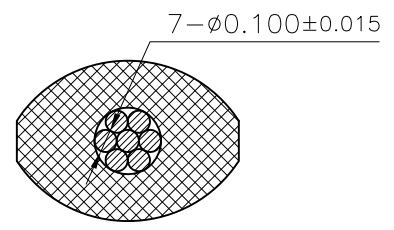

SECTION A-A (4:1)

SECTION A-A (4:1)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS: mm	2651 GRAY FLAT CABLE
SHEET SIZE: A4	SERIES: DS1057

DRAWING TYPE	CUSTOMER
SCALE: 1:1	SHEET: 1 OF 1
DRAWING NO.: C-DS1057-XXXXX-X-J	

晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD