TP-LINK[®]

300Mbps Wireless N ADSL2+ Modem Router TD-W8961ND

• Features:

- All-in-One: ADSL2+ modem, NAT router, 4-port switch and wireless N access point in one device provides an one-stop networking solution
- 300Mbps wireless speed makes it ideal for bandwidth consuming or interruption sensitive applications like online gaming, Internet call and even the HD video streaming
- Easy Setup Assistant with multi-language support provides quick & hassle free installation¹
- Wi-Fi On/Off Button allows users to simply turn their wireless radio on or off
- WPS Button allows users to easily setup a WPA encrypted secure connection
- SPI and NAT firewall protects end-user devices from potential attacks across the Internet
- 4000V Lightning Protection helps your device to avoid the damage of tough thunderstorms
- \bullet Port VLAN binds specific LAN ports to PVCs for an enjoyable $\rm IPTV$ experience^2



www.tp-link.com

• Description:

TP-LINK's Wireless N ADSL2+ Modem Router TD-W8961ND is an All-in-One device that combines the functions of a high speed ADSL modem, a 4-Port 10/100Mbps NAT Router and a Wireless N Access point. It is designed to give you an one-stop solution to acquiring and sharing high speed Internet access over a wired/wireless network. Supporting the latest ADSL2+ standards, the TD-W8961ND brings with it much higher speed than a dial-up connection without tying up the phone line. Besides, Easy Setup Assistant with multi-language support provides quick & hassle free installation.

The TD-W8961ND provides high-speed, unrivaled wireless performance for your network at 300Mbps. Now you can enjoy more kinds of bandwidth consuming applications even like HD video streaming wirelessly. Along with the features of Dual Firewalls (NAT and SPI), QoS engine and TR-069, making TD-W8961ND the perfect choice for home or small office users.

^{1.} IPTV application may require subscribing to IPTV services from an ISP.

^{2.} The Easy Setup Assistant Utility supports Windows 2000/XP/Vista and Windows 7 operating system at present.


• Specifications:

	200Mine Miles and ADCI 24 Marchare Deather
Product Description	300Mbps Wireless N ADSL2+ Modem Router
LAN Ports WAN Port	4 10/100Mbps RJ45 LAN Ports 1 RJ11 DSL Port
IEEE Standards	IEEE 802.3, 802.3u
	Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1(G.DMT),
ADSL Standards	ITU-T G.992.2(G.Lite), ITU-T G.994.1 (G.hs)
ADSL2 Standards	ITU-T G.992.3 (G.dmt.bis), ITU-T G.992.4 (G.lite.bis)
ADSL2 Standards	ITU-T G.992.5
	Downstream: Up to 24Mbps
Data Rates	Upstream: Up to 1Mbps
ATM / PPP Protocols	ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs)
	ATM Adaptation Layer Type 5 (AAL5)
	Bridged and routed Ethernet encapsulation
	VC and LLC based multiplexing
	PPP over Ethernet (RFC2516)
	PPP over ATM (RFC 2364)
	IPoA (RFC1577/2225)
	Dynamic Host Configuration Protocol (DHCP), DHCP relay
Main Features	Network Address Translation (NAT)
	Static Routing, RIP v1/v2
	VPN (PPTP, L2TP, IPSec) Pass-through
	PVC/Ethernet Port Mapping
	VLAN, 802.1P
	DNS Relay, DDNS
	IGMP Multicast, IGMP snooping V1/2
	Virtual Server, DMZ, ACL (Access Control List)
	UPnP
QoS	QoS Remarking based on IPP/ToS, DSCP and 802.1p
	Web Based Configuration (HTTP), Remote management,
Management	Telnet management, Command Line Interface, SSL for TR-069, SNMP v1/2c,
	SNMP over EOC, Web Based Firmware Upgrade, CWMP (TR-069), Diagnostic Tools
	NAT Firewall
	SPI Firewall
Security	MAC/IP/Packet/Application/URL Filtering
	Denial of Service (DoS), SYN Flooding, Ping of Death
Wireless Standards	IEEE 802.11n, 802.11g, 802.11b
Frequency Range	2.4-2.4835GHz
Wireless Speed	11N: Up to 300Mbps (dynamic)
Wireless Security	Provides 64/128-bit WEP encryption security and wireless LAN ACL (Access Control List),
	WPA-PSK/WPA2-PSK authentication and TKIP/AES encryption security
Wireless Transmit Power (Max)	20dBm (Max.EIRP)
Antenna Type	Omni directional, Detachable, Reverse SMA
Dimensions (W \times D \times H)	6.9 × 4.7 × 1.1in. (174 × 120 × 29mm)
	Operating Temperature: 0°C~40°C (32°F~104°F),
Environment	Storage Temperature: -40°C~70°C (-40°F~158°F),
	Operating Humidity: 10%~90% non-condensing ,
	Storage Humidity: 5%~90% non-condensing

Specifications are subject to change without notice. IP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.

www.tp-link.com

• Diagram:

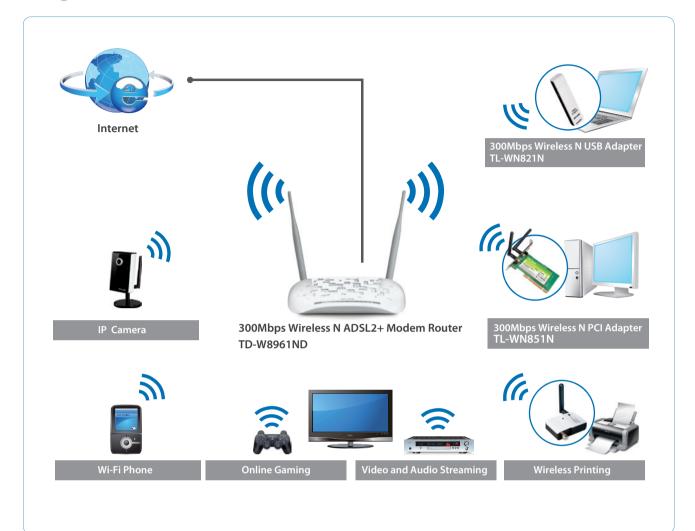

Package:

- 300Mbps Wireless N ADSL2+ Modem Router TD-W8961ND
- One Power Adapter
- One External splitter (Optional)
- Two RJ-11 Telephone Cables
- One RJ-45 Ethernet Cable
- Resource CD
- Quick Installation Guide

Related Products:

- 300Mbps Wireless N USB Adapter TL-WN821N
- 300Mbps Wireless N PCI Adapter
- TL-WN851N

Specifications are subject to change without notice. IP-LINK is a registered trademark of IP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from IP-LINK Technologies Co., Ltd. www.tp-link.com