

Super Slim LED Power Supply



CV Version



Reliable Technical Data



- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:6W
- Dimension:L98.4xW45.6xH10.7mm
- Body:PC
- Open Circuit;Short Circuit;Over Load
- Over Heat Protection

- Safety According to EN61347-1,EN61347-2-1
- EMI According to EN55015
- EMF According to EN62493-2010
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- Approbation Mark:CE ROHS;TUV;C-Tick

CC Version



Dimension in mm

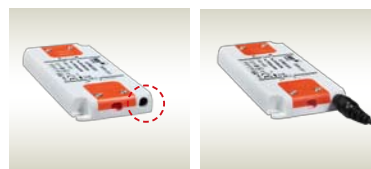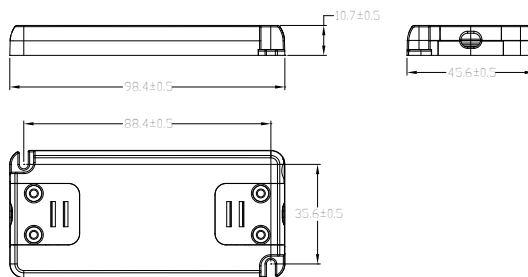

NEW direct plug-in feature!

Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant out voltage	Load	Max output Current	PF	Ta	Tc	L×W×H	Approval
SNP6-12VF	12V	0-6W	0.5A	≥0.5	45℃	80℃	98.4X45.6X10.7	TUV SAA
SNP6-24VF	24V	0-6W	0.25A	≥0.5	45℃	80℃	98.4X45.6X10.7	TUV SAA

Model No.	Constant output Current	Load	Max output Voltage	PF	Ta	Tc	L×W×H	Approval
SNP6-350IF	350mA	0-6W	17.5VDC	≥0.5	45℃	80℃	98.4X45.6X10.7	TUV SAA
SNP6-500IF	500mA	0-6W	12VDC	≥0.5	45℃	80℃	98.4X45.6X10.7	TUV SAA
SNP6-700IF	700mA	0-6W	8.5VDC	≥0.5	45℃	80℃	98.4X45.6X10.7	TUV SAA