




LED Distribution Box terminaLED®

terminaLED® P 3050 - triple distribution box for LED spots in parallel connections

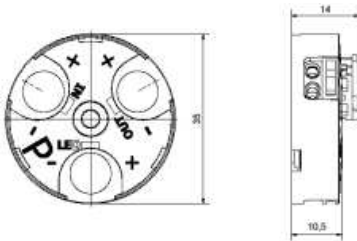

[Click here for PDF view](#)

Technical data

Connection	IDC (insulation displacement connector) 3 x 2 clamping units 0.34 – 0.5 mm ² (IN, LED, OUT)
Fixing	centrally by screw M3,5 or with a glued rear side
Mouldings	polyamide 6/6, dark grey flammability rating to UL 94: V-2 continuous working temperature 100 °C short-time temperature 160 °C
Cables	XYFAZ 2 x 0.5 mm ² , flexible twin cable red/black on reels, 50 metres or 100 metres to be ordered separately as accessories
Contacts	bronze, plated
Voltage rating	150 V according EN 60 598-1
Current rating	6 A (0.5 mm ²) resp. 5 A (0.34 mm ²) at T 60 °C
Protection class	IP 20

Order info

Description	Item	Order No.	PU	
LED distribution box	terminaLED® P 3050	605103	50	>
Cables 50 meters	XYFAZ 2 x 0,5 50	609950	1	>
Cable 100 metres	XYFAZ 2 x 0,5 100	6099X0	1	>