


SPA-2

Replaceable Probe

Product Family: SPA

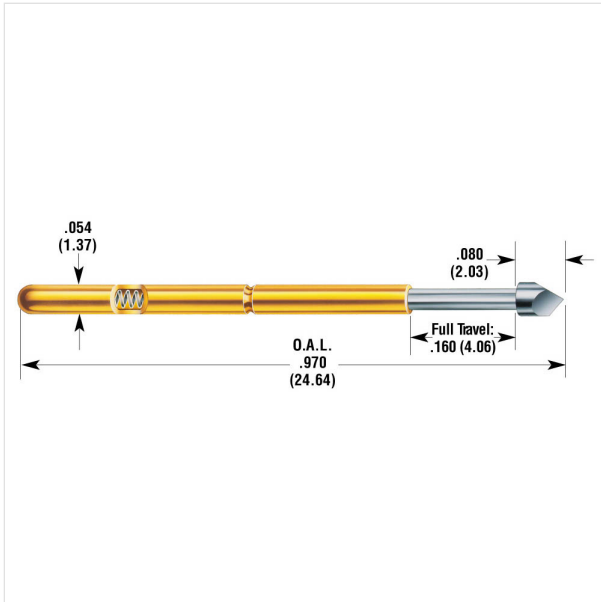

Mechanical:

Test Center (mil): 100
Test Center (mm): 2.54
Overall Length (mil): 970
Overall Length (mm): 24.64
Full Travel (mil): 160
Full Travel (mm): 4.06
Recommended Travel (mil): 107
Recommended Travel (mm): 2.72
Mechanical Life (no of cycles): 2,000,000

Thermal:

Max Operating Temp (°C): 105
Min Operating Temp (°C): -55

Electrical:

Current Rating (Amps): 5
Average Probe Resistance (mOhm): 50

Springs

Force Type - Preload in oz (g) - Rec. Travel in oz (g) - Spring Material

Standard - 1.08 (31.00) - 3.50 (99.00) - Music Wire, Silver plated

Alternate - 2.64 (75.00) - 6.50 (184.00) - Music Wire, Silver plated

Ultra High - 4.09 (116.00) - 10.00 (283.00) - Music Wire, Silver plated

Body Type

Straight

Pylon Bend

Materials & Finishes:

Plunger Material: Heat-treated BeCu, Rhodium plated over hard Nickel


Barrel Material: Work-hardened Nickel Silver, Gold plated over hard Nickel

TIPS:


Tip Materials: BeCu

Tips:


SPA-2A




SPA-2B30




SPA-2B40




SPA-2C30




SPA-2C40




SPA-2D




SPA-2E




SPA-2F




SPA-2G30




SPA-2G40




SPA-2H



SPA-2J30




SPA-2J40




SPA-2L




SPA-2P



SPA-2T




SPA-2X




Related Products:


SPR-2W




SPR-2W-1




SPR-2W-2



SPR-2W-3



SPR-2Y



PIE-25

