



BLOWING AIRFLOW DIRECTION 97±2 8±2

Impeller material Black metal Protection degree IP44, according to EN60529 standard Fixing system By n°4 M4 screws **Motor protection** Thermally protected Erp2013 compliant Erp2015 compliant Insulation class **Electrical connection** 4 leads, 500 mm long

4uF / 450V Capacitor **Approvals**

CE

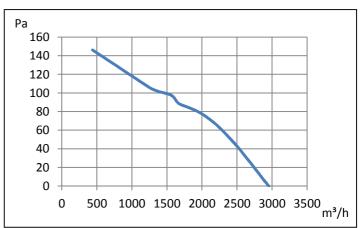

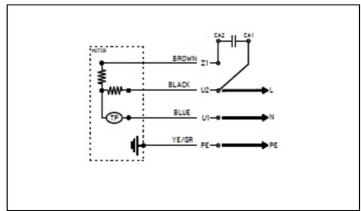

	Model	Bearing	Voltage	Freq.	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
i			(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
1	VRE35A23HA0	Ball	230	50	0,8	182	2957	146		1372	CE

All specifications, data and drawings are subject to changes without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.

www.Fandis.it VRE35A23HA0 1/1