


# LINDY PRODUCT SPECIFICATION (1 OF 2)

Length	Polybag Size	Label Type	Product Number
0.25m	FP2	LSS	36340
1m	FP3	LSM	36341
2m	FP3	LSM	36342
3m	FP3	LSM	36343
5m	FP3	LSM	36344
7.5m	FP4	LSM	36345
10m	FP4	LSM	36346
15m	FP4	LSM	36347
20m	FP4	LSM	36348

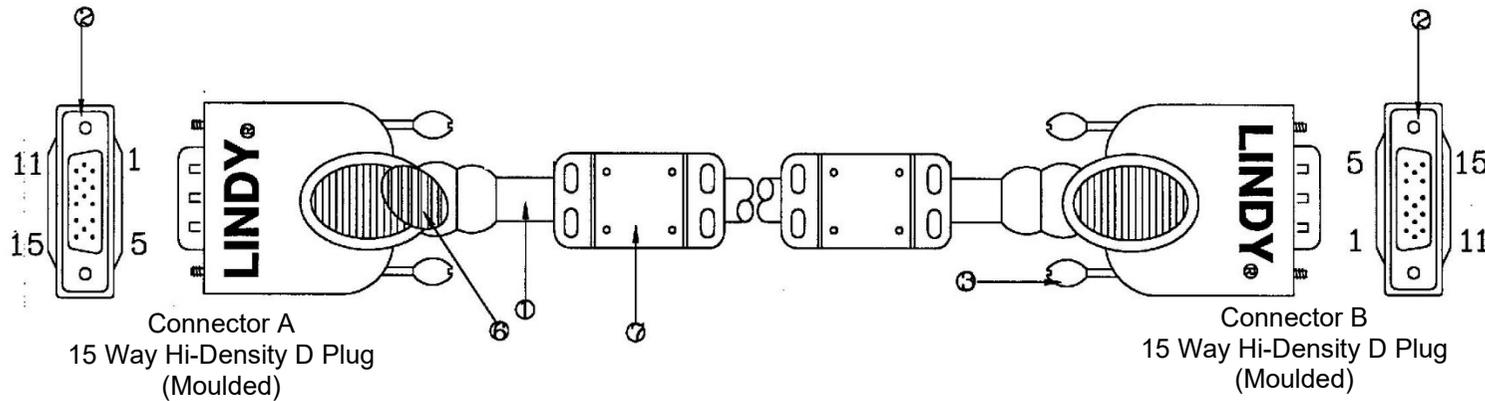

**Cable-Printing:**  
 "LINDY High Quality VGA Cable UL2919 --- RoHS --- www.LINDY.com"


A	B	Function										
<table border="1" style="width: 100%;"> <thead> <tr> <th style="background-color: black; color: white;">Description</th> </tr> </thead> <tbody> <tr> <td>Ferrite core (RH17.5*9.5*28.5)</td> </tr> <tr> <td>Copper foil 360° solder</td> </tr> <tr> <td>Outside moulding PVC colour: LINDY cool grey 1C</td> </tr> <tr> <td>Inside moulding: PE</td> </tr> <tr> <td>Screw #4-40 colour: LINDY-Red</td> </tr> <tr> <td>HD15P Male solder type</td> </tr> <tr> <td>Cable : UL E119932 {28AWG x 3COAX+}</td> </tr> <tr> <td>24AWG x 8C, Double Shield</td> </tr> <tr> <td>Jacket colour: LINDY- cool grey 1C with LINDY-printing</td> </tr> </tbody> </table>			Description	Ferrite core (RH17.5*9.5*28.5)	Copper foil 360° solder	Outside moulding PVC colour: LINDY cool grey 1C	Inside moulding: PE	Screw #4-40 colour: LINDY-Red	HD15P Male solder type	Cable : UL E119932 {28AWG x 3COAX+}	24AWG x 8C, Double Shield	Jacket colour: LINDY- cool grey 1C with LINDY-printing
Description												
Ferrite core (RH17.5*9.5*28.5)												
Copper foil 360° solder												
Outside moulding PVC colour: LINDY cool grey 1C												
Inside moulding: PE												
Screw #4-40 colour: LINDY-Red												
HD15P Male solder type												
Cable : UL E119932 {28AWG x 3COAX+}												
24AWG x 8C, Double Shield												
Jacket colour: LINDY- cool grey 1C with LINDY-printing												

<b>Product Name: VGA Cable with Ferrite Core</b>						
<ul style="list-style-type: none"> <li>Connector P1: 15 Way Hi-Density D Male with Thumbscrews</li> <li>Connector P2: 15 Way Hi-Density D Male with Thumbscrews</li> <li>Cable Type: OFC (Oxygen Free Copper) Cable UL2919 1:1, triple Coax for RGB, Aluminium foil + Braid shielded, Both ends of cable have ferrite core (except 0.25m which has only one)</li> <li>Cable Colour: Cool Grey</li> <li>RoHS &amp; REACH compliant</li> <li>Packaging: LINDY Polybag (sizes above) and barcode label</li> </ul>						
Alterations		Issue	Date	BY	GB	DE
Packaging Update		2	26.01.15	Kr		ML
Packaging update		3	27.02.17	ML		ML
Packaging updated & drawings added		4	14.11.19	ML	CS	
Drawn By: ML, 08.08.2014		© Lindy group. All rights reserved. <a href="http://lindy.com">lindy.com</a>				
All connectors viewed from front						
<b>Tolerances:</b> Overall Length 0% +10% Conductor +/- 0.01mm per core						

# LINDY PRODUCT SPECIFICATION (2 OF 2)

Product Number

## Additional Imagery

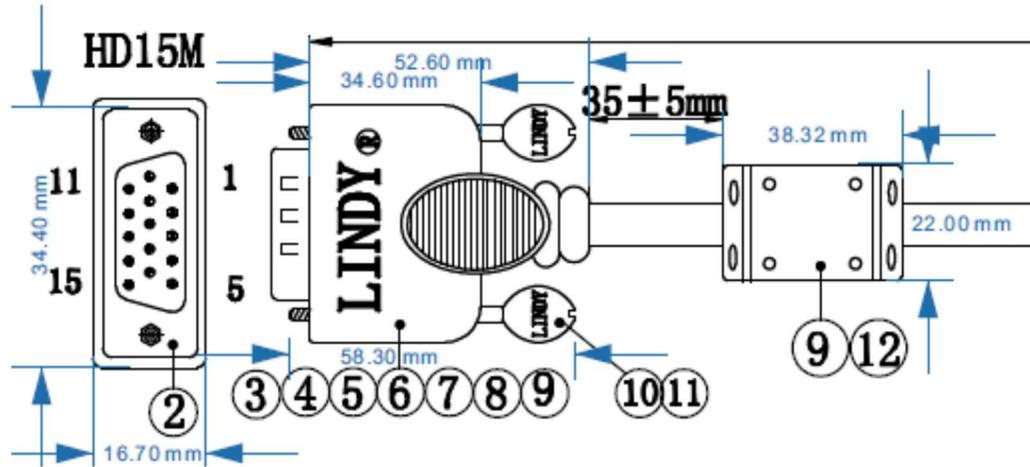

## Additional Description

36340  
36341  
36342  
36343  
36344  
36345  
36346  
36347  
36348