
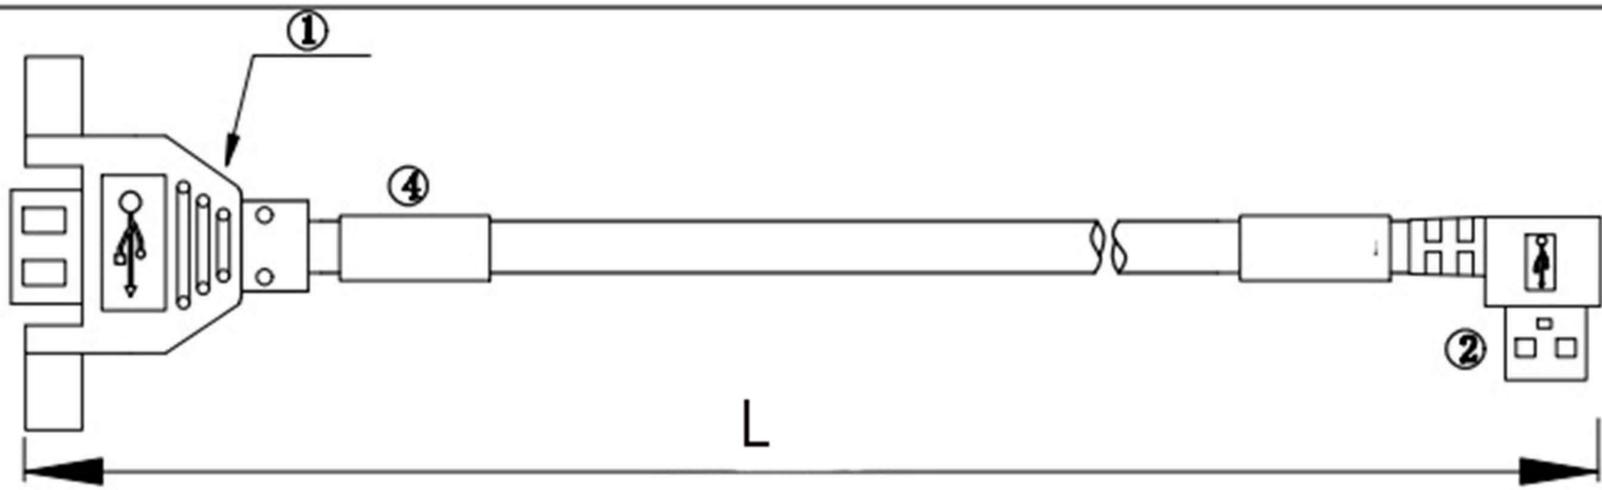
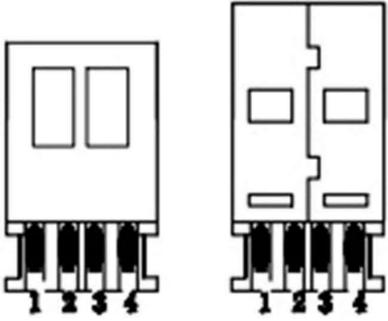
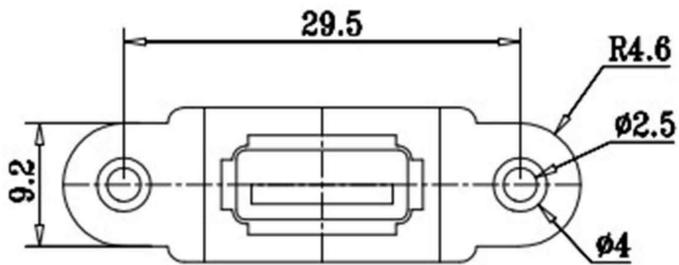


A**B**

Diagram

**Main Feature**

1. USB: Side A Female, Side B Male moulded connectors
2. USB cable: 7*0.12AS PVC1.0 ±0.1*4C+32*0.125TS shielded+AL
Ø 4.3±0.1 black PVC
3. Parts are ROHS compliant
4. 100% connection test, no open circuit, shortcut, wrong connection.
minimum insulation resistance 10MΩ
maximum contact resistance 5 Ω
5. The positive dimension tolerance is 50mm and there is no negative tolerance (including the plug).

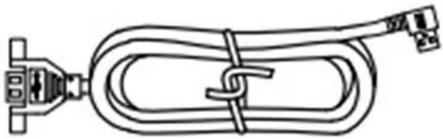

Unit of measurement: millimeters (mm)

