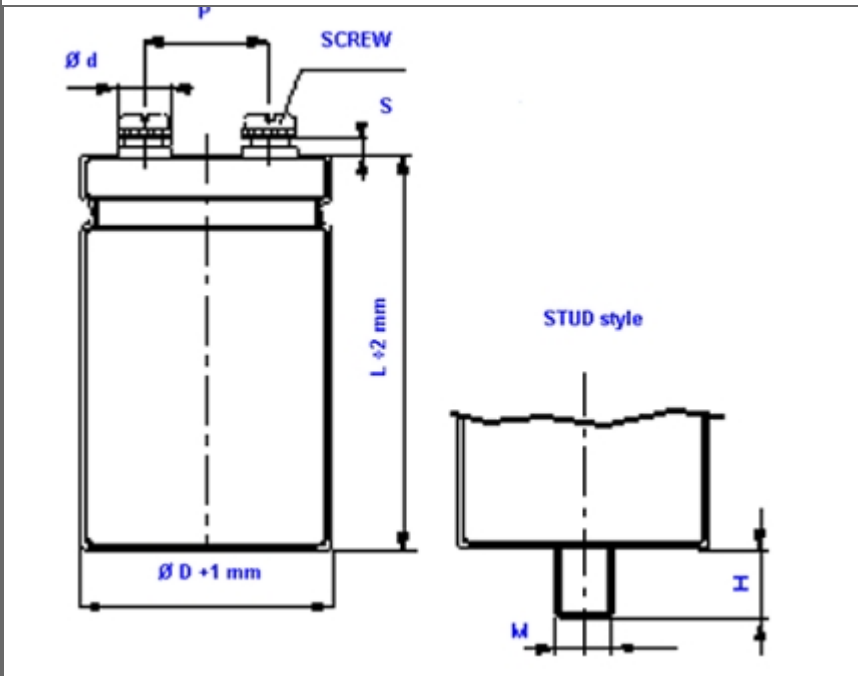


| Diagram of dimensions (unit = mm) | | | | | | 76X143 |
|---|-----------------------------------|--------------|---------------------------------------|----|-----------------------|---|
| ØD | d | P | M | H | SREW |  |
| 35 | 11 | 12.7 | M8 | 12 | 5MA x 9.5 | |
| 51 | 18.5 | 22.2 | M12 | 16 | 5MA x 9.5 | |
| 63 | 18.5 | 28.6 | M12 | 16 | 5MA x 9.5 | |
| 76 | 18.5 23.2 | 31.8 31.8 | M12 M12 | 16 | 5MA x 9.5 6MA x 10 | |
| 90 | 23.2 | 31.8 | M12 | 16 | 6MA x 10 | |
| L1 | L1 = L + 2.5mm L1 toll. -0+3mm | | L1 = L + 4.5 mm L1 toll. -1 + 3 mm | | | |
| S | M5 = 5 -0+1mm from top of deck | | M6 = 7 -1+1mm from top of deck | | | |
| Marking | | | | | | |
| Type - Identification Code Lot | | | | | | |
| Rated capacitance (µF), Rated voltage (Vdc) | | | | | | |
| Negative polarity: gold row | | | | | | |
| Product compliant to Directive 2002/95/EC | | | | | | |

ELECTRICAL PARAMETERS

| | | |
|-------------------------------|---------------------------------------|---|
| Nominal Capacitance | 22000 | µF at 100 Hz |
| Tolerance Standard | M | = -20% +20% on request Q = -10% +30% |
| Temperature Range | | -40°C to 85°C |
| Rated Voltage / Surge Voltage | 200/230 | VDC |
| Max Tang δ | 0.18 | at 100 Hz |
| Typical ESR | 9 | mΩ at 100 Hz |
| Typical Impedance Z | 9 | mΩ at 10 kHz |
| Maximum Leakage Current | 6.00 | mA after 5 mins at 20°C |
| Maximum Ripple Current | 28.90 | A rsm at 85°C |
| Useful Life | > 12000 | hours at 85°C for Vr<=100V and for Vr>=500V |
| Useful Life | > 15000 | hours at 85°C for 100V < Vr < 500V |
| Reference Standards | CECC 30.300 IEC 384.4 Long Life Grade | |

When ambient temperature and ripple frequency are different from 85°C and 100 Hz, ripple current shall be multiplied by the following compensating factor:

| | | | | | | | | | | | | | |
|------------------|-------|--------|--------|---------|----------|--------------------|------|------|------|------|------|------|------|
| FREQUENCY | 50 Hz | 100 Hz | 500 Hz | 1000 Hz | > 10 kHz | TEMPERATURE | 35°C | 45°C | 55°C | 65°C | 75°C | 85°C | 95°C |
| FACTOR | 0.8 | 1.0 | 1.2 | 1.3 | 1.5 | FACTOR | 2.2 | 2.1 | 1.8 | 1.6 | 1.4 | 1.0 | 0.5 |