







Inlet / Outlet Configuration	Outlet <b>P - Standard C13 (70°)</b>
	<b>C13</b> 
Mounting	Rewirable cable connector
No of fuses	0
Voltage selector	Without
Switch	None
Rated current	10,0 A (15,0 A acc. UL)
Rated voltage	250 V <sub>RMS</sub>
Approvals	

Rewirable socket connectors, 3 choices for the cable outlet.

Cable entry centric

Configuration/Standard sheet number please see technical data

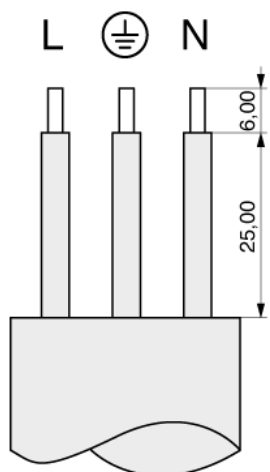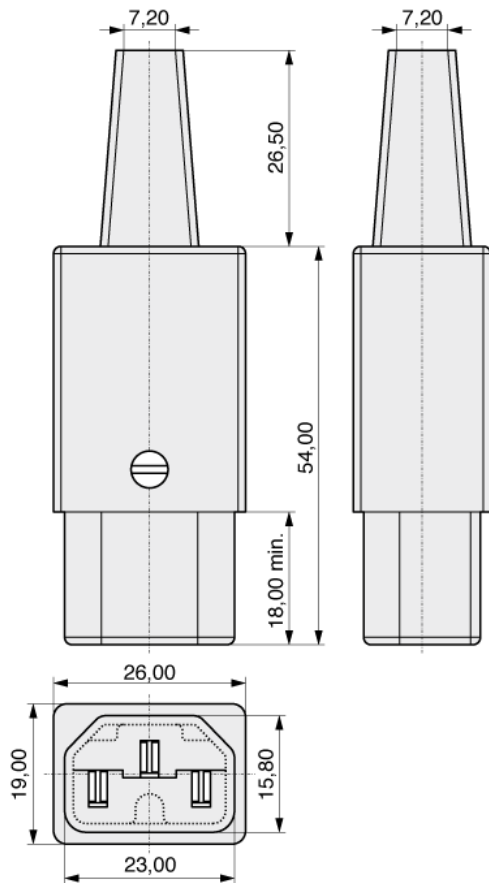

**Order code: 43R011311**



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Date: 31.05.2017 Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=16&s\\_product=43R011311](http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=43R011311)