


AMP SUPERSEAL 1.5 SERIES Connectors

for the Automotive Market





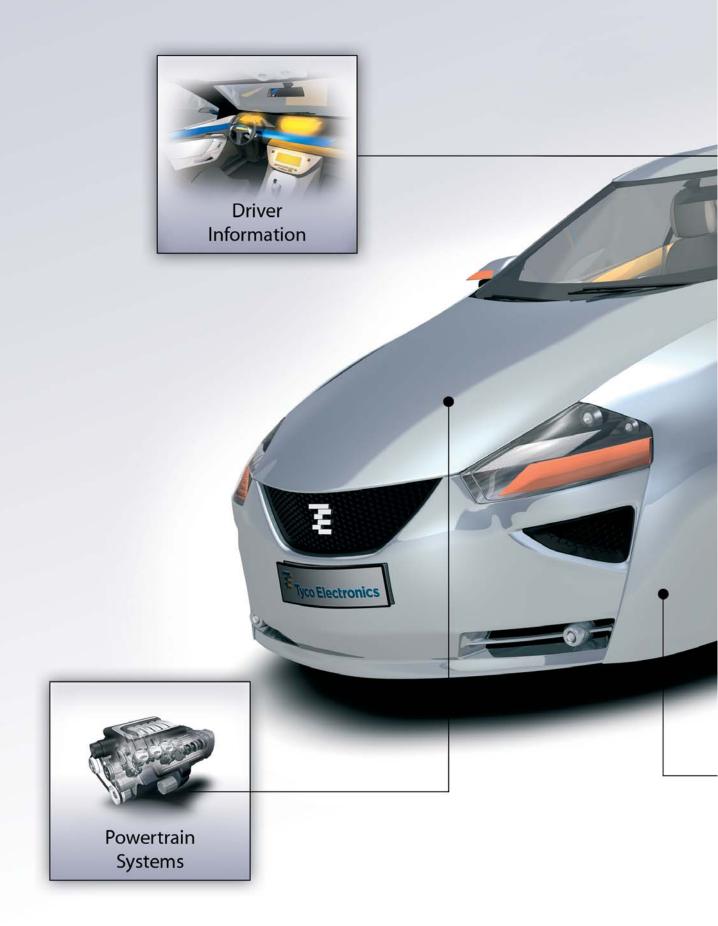



INNOVATIVE TECHNOLOGIES

Tyco Electronics is the world's largest passive electronic components manufacturer and a world leader in cutting-edge wireless technologies. Tyco Electronics has facilities located in over 50 countries, serving customers in the aerospace, automotive, computer, communications, consumer electronics, industrial and power industries. The global automotive division follows the globalization goals of our customers, speeds up the integration of new technologies and enables our customers access to our vast product portfolio and services.

TERMINALS & CONNECTORS



Tyco Electronics offers a broad range of high quality terminals and connectors. Our electrical/electronic interconnection products and solutions are used to electrically and mechanically join wires and cables, printed circuit boards, integrated circuit packages and batteries. Tyco Electronics expanding capabilities include new copper and fiber-optic connectors, wires, cables/cable management systems that are designed to meet automotive industry demands. The AMP brand encompasses the broadest range of connectors in the world,

including high-density, high-speed designs for leading-edge communications equipment.

LITERATURE NO. 1308092-2

CABLE ASSEMBLY SYSTEMS



Tyco Electronics is your partner for special cable assemblies. Tyco Electronics offers research and development capabilities, prototyping, samples as well as manufacturing facilities for special cable assemblies. This includes overmold technology, semi/fully automatic manufacturing, testing equipment and appliances for handling of high volume production.

LITERATURE NO. 1654288-2

MECHATRONICS



A variety of technical products are designed today by integrating mechanical components and electronic hardware into one packaging unit thus creating true mechatronic solutions. Mechatronic applications offer amazing and versatile potentials related to functionality, cost, space requirements and quality. Tyco Electronics contributes to those applications with its wide range of innovative and cost-effective product and process technologies.

Advanced stamping, injection molding and assembly techniques are applied along with highly selective surface plating methods.

LITERATURE NO. 1308091-2

SENSOR TECHNOLOGY



Contact-less measuring eliminates interference effects, wear and tear, and provides increased reliability. Tyco Electronics, one of the largest technology providers for the automobile industry, offers contact-less sensors for a variety of applications. As sensor manufacturer and processing partner, Tyco Electronics also provides project planning support for new sensor applications, assistance in the selection of the appropriate sensor technology for the respective application, and assistance with defining the corresponding mechanical, electrical

and magnetic interface. Tyco Electronics has a broad electromechanical portfolio that includes robust housing technologies, connector systems, and temperature stable designs based on foil and cable networks. This combination of technologies and experience ensures that reliable and cost effective sensor solutions are available for all application types.

LITERATURE NO. 1308086-2

RELAYS AND SWITCHING MODULES



Automotive technology and integrated systems continue to develop rapidly with electric and electronic systems in today's vehicles playing an increasingly important role for traffic safety and travelling comfort. Automotive Relays and Switching Modules (AR & SM) of Tyco Electronics' Global Automotive Division offer a wide range of the most important components for such systems and is the world's number one participant in this industry sector. Tyco Electronics has competencies in development, production and related technologies

as well as application support, which ensures a competitive edge and mutual business growth on a worldwide scale.

LITERATURE NO. 1308085-2



POWER DISTRIBUTION SYSTEMS



In automotive environments, the extensive net of electrical/electronic loads requires complex powernet structures. The next evolution of these structures include intelligent control and distribution systems.

Tyco Electronics is working on modules with intelligent technology combinations. Our capabilities include, power distribution units that incorporate integrated switching and protection functions along with flexibility and maximizing modularity to best suit our customer needs.

LITERATURE NO. 1308087-2

INDUCTIVE SYSTEMS



The Global Automotive Division is your source for interconnection and wireless technologies for automotive, truck and off-highway OEMs and Tier 1 suppliers. With the design competency center in Oostkamp (Belgium), and strategic production centers in Evora (Portugal), Bangalore (India), Shenzhen (China), and Oostkamp (Belgium), Tyco Electronics Inductive Systems is ready to offer you any LF-application component required in the automotive industry.

The Inductive System group focuses on the customer requirement in order to design to the exact demand. This is achieved by highly- technical, intelligent and cost-efficient engineering. In order to be a leader in design, Tyco Electronics Inductive Systems has a vast product portfolio, which consists out of antennas, actuators and integrated modules. Next to that, several specific applications are designed.

LITERATURE NO. 1308089-2

ALTERNATIVE POWER SYSTEMS COMPONENTS FOR HYBRID AND FUELCELL TECHNOLOGY



Tyco Electronics is a leader in next-generation transportation technologies and products for hybrid and electric vehicles. The Global Automotive Division is your source for high voltage power distribution, high current contacts, high voltage connectors and cables, high voltage relays, sensors and temperature protection devices for hybrid and other alternative powered vehicles.

LITERATURE NO. 1308093-2

HIGH SPEED DATA NETWORKING




High speed data networking within the automobile is becoming more predominant. What was till now restricted to the high end of the market utilizing system such as the MOST® network, high speed data transmission based on optical fibers, now with the introduction of iPOD's, display screens and cameras results in the need for high speed networking throughout all platforms.

MOST® IS A TRADEMARK

LITERATURE NO. 1308084-2

WIRELESS TECHNOLOGIES RADAR SENSORS & ANTENNAS FOR TELEMATICS



Tyco Electronics is a world leading supplier of radar technology for the automotive industries. In cooperation with system integrators and OEMs, Tyco Electronics developed 24 GHz high resolution short range radar sensors in Ultra Wide Band technology and 77 GHz Adaptive Cruise Control radar front ends suitable for driver assistance applications, which enable advanced active and passive safety systems.

Tyco Electronics develops, produces and supplies antennas for the automotive industries. Single to Quad band antennas are available in state of the art planar and dipole technologies. All telematic frequency bands for satellite radio, navigation, emergency positioning and cellular mobile communications are covered.


LITERATURE NO. 1308090-2

TYCO ELECTRONICS. OUR COMMITMENT. YOUR ADVANTAGE.

Tyco Electronics' businesses operate in thousands of different areas of industry. The products and services we deliver all have one thing in common: They are vital to everyday living. Individuals and companies worldwide have critical needs. And every minute of every day, we satisfy them.



TYCO ELECTRONICS "TECHNOLOGY PORTFOLIO"

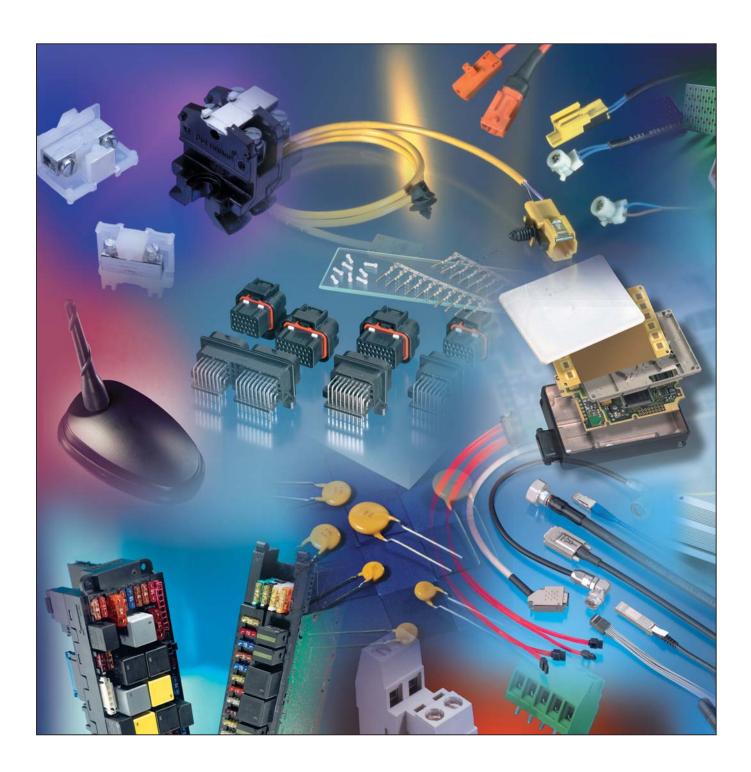

- Connector Systems / Electromechanical Components
- Relays
- Wireless Products
- Sensors
- Fiber Optic Products
- Wire & Cable
- Application Tooling

- Antennas, GPS Antennas, Integrated Antenna Systems
- Circuit Protection Devices
- Tubing & Harnessing Products
- Touch Screen Displays
- Resistors & Inductors
- Heat Sinks & Thermal Solutions
- Switches and Knobs

- Battery Connectors & Assemblies
- Identification Labeling Products
- Racks & Panels
- Smart Cards / Leadframes



Tyco Electronics Online

The Tyco Electronics website is an innovative and interactive source for application information, product updates and technical solutions.

Our step-by-step software makes our website intuitive and user-friendly to better serve you!

Please contact us at:

www.tycoelectronics.com/automotive

Internet Homepage

www.tycoelectronics.com/automotive

Electronic Internet Catalog

www.catalog.tycoelectronics.com

Product Information Center (PIC)

You can rely on Tyco Electronics PIC Team to provide you support for answers to your general information or technical questions in an efficient and effective manner. To reach our PIC staff, please contact your




Product and Machine Literature

Tyco Electronics offers a variety of product specific catalogs, brochures and high impact flyers to help better serve you!


For more information on literature for Tyco Electronics'


Global Automotive Division, please contact your local Tyco Electronics


Organization or go to www.tycoelectronics.com/automotive





Quality Guidelines

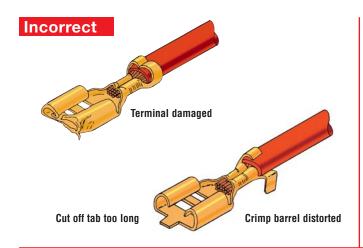












INSULATION CRIMP











securely held



Insulation is pierced and could damage conductor





Insulation legs are not closed

Insulation material is pierced





Insulation is not securely held Legs do not overlap

Insulation is over crimped

WIRE CRIMP

Incorrect applicator adjustment

Asymmetric crimp

crimp flash and/or co



Terminal feed incorrectly adjusted

Unacceptable formation excessive flash and/or cracks



Anvil and crimper not aligned or worn

Incorrect terminal/wire selection

Wire size too large



Crimp barrel does not close

Wire size too small



Legs too close to bottom of crimp. Insufficient deformation of strands, showing voids

Incorrect crimp height adjustment

Crimp height too loose




Insufficient deformation, showing voids





Flash at under side of crimp, due to over crimping

Quality Guidelines (continued)

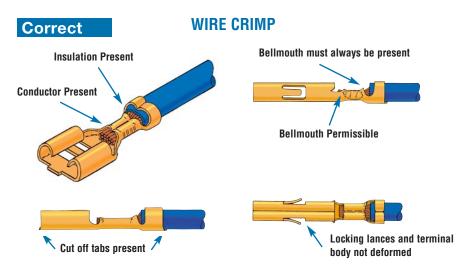

Correct selection of wire, terminal and applicator






Crimp barrel is closed, legs support each other

Sufficient gap between legs and bottom of crimp

All strands are equally distributed and deformed

INSULATION CRIMP

Correct Insulation Diameter, Applicator and Terminal








Insulation is securely held Crimp barrel closed

For double wire applications with different size wires always place wire with smallest outer diameter in the bottom







Insulation is securely held Legs overlap

WRAP OVER Crimp






Insulation securely held Legs must pass each other

Test

WIRE CRIMP



Crimp heights and tolerances

For crimp height tolerances for any given contact, please refer to the relevant application specification.


Examples:

Con- tact	Part No.	Wire Range (mm²)	Toler- ance (mm)	Appli- cation Spec.
MQS	962885	0.2-0.5	±0.03	114-18025
	962886			
JPT	927775	0.5-1.0	±0.05	114-18050
JPT	927773	1.5-2.5	±0.05	114-18050

Digital Crimp Height Micrometer (0.001 mm increments) acc. to DIN ISO 9001 Part No. 547203-1



INSULATION CRIMP



after bend test

AMP SUPERSEAL 1.5 SERIES Connectors

for the Automotive Market

Catalog 1654292-2 Revised 6-2008

Restriction on the Use of Hazardous Substances (RoHS)

Restriction on the Use of Hazardous Substances (RoHS)

At Tyco Electronics, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant

Part numbers in this catalog are RoHS Compliant, unless marked otherwise.

These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

Note: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

Non-RoHS Compliant

These part numbers are identified with a "♦" symbol. These products do not comply with the material restrictions of the European Union Directive 2002/95/EC.

5 of 6 Compliant

A "•" symbol identifies these part numbers. These products do not fully comply with the European Union Directive 2002/95/EC because they contain lead in solderable interfaces (they do not contain any of the other five restricted substances above allowable limits). However, these products may be suitable for use in RoHS applications where there is an application-based exception for lead in solders, such as the server, storage, or networking infrastructure exemption.

Note: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced below.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog: http://ecommas.tycoelectronics.com/commerce/alt/RohsAltHome.do
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above

RoHS Customer Support Center

So whatever your questions when it comes to RoHS, we've got the answers at www.tycoelectronics.com/leadfree

AWG Conversion Table (Average Value)

Conversion Tables

Most of the wire size ranges are mentioned in mm², as well as the insulation diameters which are in many cases only in mm's.

We therefore included the conversion tables on pages 12 and 13.

Please note that wire and insulation sizes are for guidance only.

Consult the customer drawing for precise detail.

AWG Code	Diameter (Inch)	Diameter (mm)	F (mm²)
000000	0.5800	14.733	170.0
00000	0.5165	13.13	135.0
0000	0.4600	11.684	103.8
000	0.4096	10.40	79.0
00	0.3648	9.27	67.5
0	0.3249	8.25	53.4
1	0.2893	7.34	42.2
2	0.2576	6.55	33.7
3	0.2294	5.82	26.6
4	0.2043	5.18	21.0
5	0.1819	4.62	16.9
6	0.1620	4.115	13.25
7	0.1443	3.66	10.25
8	0.1285	3.26	8.34
9	0.1144	2.90	6.6
10	0.1019	2.59	5.27
11	0.0907	2.30	4.15
12	0.0808	2.05	3.3
13	0.0720	1.83	2.63
14	0.0641	1.63	2.08
15	0.0571	1.45	1.65
16	0.0508	1.29	1.305
17	0.0453	1.14	1.01
18	0.0403	1.02	0.79
19	0.0359	0.91	0.65
20	0.0320	0.81	0.51
21	0.0285	0.72	0.407
22	0.0253	0.64	0.32
23	0.0226	0.57	0.255
24	0.0201	0.51	0.205
25	0.0179	0.455	0.162
26	0.0159	0.40	0.125
27	0.0142	0.36	0.102
28	0.0126	0.320	0.08
29	0.0113	0.287	0.0646
30	0.0100	0.254	0.0516
31	0.0089	0.226	0.04
32	0.0080	0.203	0.0324
33	0.0071	0.180	0.0255
34	0.0063	0.160	0.02
35	0.0056	0.142	0.0158
36	0.0050	0.127	0.0127
37	0.0045	0.114	0.01
38	0.0040	0.101	0.008
39	0.0035	0.089	0.0062
40	0.0031	0.079	0.0049
41	0.0028	0.071	0.00395
42	0.0025	0.064	0.00321
43	0.0022	0.056	0.00246
44	0.00198	0.050	0.00196
45 46	0.00176	0.045	
1	0.00157	0.040	
47	0.00140	0.036	
48	0.00124	0.031	
49	0.00110	0.028	
50	0.00099	0.025	

FLK/FLR Cable

FLK and FLR stand for German DIN (72551) abbreviations.

FLK means:

In German:

- Fahrzeug Leitung Kunststoff
- In English:
 Vehicle Cable Plastic

FLR means:

In German:

- Fahrzeug Leitung Reduziert In English:
- Thin Walled Cable (reduced insulation thickness)

Remark: Starting from 0.03 mm² (AWG 32) a wire can be crimped.



Conversion Table - Inch/mm

Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009
0	0	0.0254	0.0508	0.0762	0.1016	0.1270	0.1524	0.1778	0.2032	0.2286
0.010	0.2540	0.2794	0.3048	0.3302	0.3556	0.3810	0.4064	0.4318	0.4572	0.4826
0.020	0.5080	0.5334	0.5588	0.5842	0.6096	0.6350	0.6604	0.6858	0.7112	0.7366
0.030	0.7620	0.7874	0.8128	0.8382	0.8636	0.8890	0.9144	0.9398	0.9652	0.9906
0.040	1.0160	1.0414	1.0668	1.0922	1.1176	1.1430	1.1684	1.1938	1.2192	1.2446
0.050	1.2700	1.2954	1.3208	1.3462	1.3716	1.3970	1.4224	1.4478	1.4732	1.4986
0.060	1.5240	1.5494	1.5748	1.6002	1.6256	1.6510	1.6764	1.7018	1.7272	1.7526
0.070	1.7780	1.8034	1.8288	1.8542	1.8796	1.9050	1.9304	1.9558	1.9812	2.0066
0.080	2.0320	2.0574	2.0828	2.1062	2.1336	2.1590	2.1844	2.2098	2.2352	2.2606
0.090	2.2860	2.3114	2.3368	2.3622	2.3876	2.4130	2.4384	2.4638	2.4892	2.5146
0.100	2.5400	2.5654	2.5908	2.6162	2.6416	2.6670	2.6924	2.7178	2.7432	2.7686
0.110	2.7940	2.8194	2.8448	2.8702	2.8956	2.9210	2.9464	2.9718	2.9972	3.0226
0.120	3.0480	3.0734	3.0988	3.1242	3.1496	3.1750	3.2004	3.2258	3.2512	3.2766
0.130	3.3020	3.3274	3.3528	3.3782	3.4036	3.4290	3.4544	3.4798	3.5052	3.5306
0.140	3.5560	3.5814	3.6068	3.6322	3.6576	3.6830	3.7084	3.7338	3.7592	3.7846
0.150	3.8100	3.8354	3.8608	3.8862	3.9116	3.9370	3.9624	3.9878	4.0132	4.0386
0.160	4.0640	4.0894	4.1148	4.1402	4.1656	4.1910	4.2164	4.2418	4.2672	4.2926
0.170	4.3180	4.3434	4.3688	4.3942	4.4196	4.4450	4.4704	4.4958	4.5212	4.5466
0.180	4.5720	4.5974	4.6228	4.6482	4.6736	4.6990	4.7244	4.7498	4.7752	4.8006
0.190	4.8260	4.8514	4.8768	4.9022	4.9276	4.9530	4.9784	5.0038	5.0292	5.0546
0.200	5.0800	5.1054	5.1308	5.1562	5.1816	5.2070	5.2324	5.2578	5.2832	5.3086
0.210	5.3340	5.3594	5.3848	5.4102	5.4356	5.4610	5.4864	5.5118	5.5372	5.5626
0.220	5.5880	5.6134	5.6388	5.6642	5.6896	5.7150	5.7404	5.7658	5.7912	5.8166
0.230	5.8420	5.8674	5.8928	5.9182	5.9436	5.9690	5.9944	6.0198	6.0452	6.0706
0.240	6.0960	6.1214	6.1468	6.1722	6.1976	6.2230	6.2484	6.2738	6.2992	6.3246
0.250	6.3500	6.3754	6.4008	6.4262	6.4516	6.4770	6.5024	6.5278	6.5532	6.5786
0.260	6.6040	6.6294	6.6548	6.6802	6.7056	6.7310	6.7564	6.7818	6.8072	6.8326
0.270	6.8580	6.8834	6.9088	6.9342	6.9596	6.9850	7.0104	7.0358	7.0612	7.0866
0.280	7.1120	7.1374	7.1628	7.1882	7.2136	7.2390	7.2644	7.2898	7.3152	7.3406
0.290 0.300	7.3660 7.6200	7.3914 7.6454	7.4168 7.6708	7.4422 7.6962	7.4676 7.7216	7.4930 7.7470	7.5184	7.5438 7.7978	7.5692 7.8232	7.5946
							7.7724			7.8486
0.310	7.8740	7.8994	7.9248	7.9502	7.9756	8.0010	8.0264	8.0518	8.0772	8.1026
0.320	8.1280	8.1534	8.1788	8.2042	8.2296	8.2550	8.2804	8.3058	8.3312	8.3566
0.330	8.3820	8.4074	8.4328	8.4582	8.4836	8.5090	8.5344	8.5598	8.5852	8.6106
0.340	8.6360	8.6614	8.6868	8.7122	8.7376	8.7630	8.7884	8.8138	8.8392	8.8646
0.350	8.8900	8.9154	8.9408	8.9662	8.9916	9.0170	9.0424	9.0678	9.0932	9.1186
0.360	9.1440	9.1694	9.1948	9.2202	9.2456	9.2710	9.2964	9.3218	9.3472	9.3726
0.370	9.3980	9.4234	9.4488	9.4742	9.4996	9.5250	9.5504	9.5758	9.6012	9.6266
0.380	9.6520	9.6774	9.7028	9.7282	9.7536 10.0076	9.7790	9.8044	9.8298	9.8552	9.8806
0.390 0.400	9.9060 10.1600	9.9314 10.1854	9.9568 10.2108	9.9822 10.2362	10.0076	10.0330 10.2870	10.0584 10.3124	10.0838 10.3378	10.1092 10.3632	10.1346 10.3886
0.410	10.4140	10.4394	10.4648	10.4902	10.5156	10.5410	10.5664	10.5918	10.6172	10.6426
0.420	10.6680	10.6934	10.7188	10.7442	10.7696	10.7950	10.8204	10.8458	10.8712	10.8966
0.430	10.9220	10.9474	10.9728	10.9982	11.0236	11.0490	11.0744	11.0998	11.1252	11.1506
0.440	11.1760	11.2014	11.2268	11.2522	11.2776	11.3030	11.3284	11.3538	11.3792	11.4046
0.450	11.4300	11.4554	11.4808	11.5062	11.5316	11.5510	11.5824	11.6078	11.6332	11.6586
0.460	11.6840	11.7094	11.7348	11.7602	11.7856	11.8110	11.8364	11.8618	11.8872	11.9126
0.470	11.9380	11.9634	11.9888	12.0142	12.0396	12.0650	12.0904	12.1158	12.1412	12.1666
0.480	12.1920	12.2174	12.2428	12.2682	12.2936	12.3190	12.3444	12.3698	12.3952	12.4206
0.490	12.4460	12.4714	12.4968	12.5222	12.5476	12.5730	12.5984	12.6238	12.6492	12.6746
0.500	12.7000									
Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009



AMP SUPERSEAL 1.5 SERIES Connectors

for the Automotive Market

 $Conversion \ Table-Inch/mm \ \ (continued)$

Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009
0.500	12.7000	12.7254	12.7508	12.7762	12.8016	12.8270	12.8524	12.8778	12.9032	12.9286
0.510	12.9540	12.9794	13.0048	13.0302	13.0556	13.0810	13.1064	13.1318	13.1572	13.1826
0.520	13.2080	13.2334	13.2588	13.2842	13.3096	13.3350	13.3604	13.3858	13.4112	13.4366
0.530	13.4620	13.4874	13.5128	15.5382	13.5636	13.5890	13.6144	13.6398	13.6652	13.6906
0.540	13.7160	13.7414	13.7668	13.7922	13.8176	13.8430	13.8684	13.8938	13.9192	13.9446
0.550	13.9700	13.9954	14.0208	14.0462	14.0716	14.0970	14.1224	14.1478	14.1732	14.1986
0.560	14.2240	14.2494	14.2748	14.3002	14.3256	14.3510	14.3764	14.4018	14.4272	14.4526
0.570	14.4780	14.5034	14.5288	14.5542	14.5796	14.6050	14.6304	14.6558	14.6812	14.7066
0.580	14.7320	14.7574	14.7828	14.8082	14.8336	14.8590	14.8844	14.9098	14.9352	14.9606
0.590	14.9860	15.0114	15.0368	15.0622	15.0876	15.1130	15.1384	15.1638	15.1892	15.2146
0.600	15.2400	15.2654	15.2908	15.3162	15.3416	15.3670	15.3924	15.4178	15.4432	15.4686
0.610	15.4940	15.5194	15.5448	15.5702	15.5956	15.6210	15.6464	15.6718	15.6972	15.7226
0.620	15.7480	15.7734	15.7988	15.8242	15.8496	15.8750	15.9004	15.9258	15.9512	15.9766
0.630	16.0020	16.0274	16.0528	16.0782	16.1036	16.1290	16.1544	16.1798	16.2052	16.2306
0.640	16.2560	16.2814	16.3068	16.3322	16.3576	16.3830	16.4084	16.4338	16.4592	16.4846
0.650	16.5100	16.5354	16.5608	16.5862	16.6116	16.6370	16.6624	16.6878	16.7132	16.7386
0.660	16.7640	16.7894	16.8148	16.8402	16.8656	16.8910	16.9164	16.9418	16.9672	16.9926
0.670	17.0180	17.0434	17.0688	17.0942	17.1196	17.1450	17.1704	17.1958	17.2212	17.2466
0.680	17.2720	17.2974	17.3228	17.3482	17.3736	17.3990	17.4244	17.4498	17.4752	17.5006
0.690	17.5260	17.5514	17.5768	17.6022	17.6276	17.6530	17.6784	17.7038	17.7292	17.7546
0.700	17.7800	17.8054	17.8308	17.8562	17.8816	17.9070	17.9324	17.9528	17.9832	18.0086
0.710	18.0340	18.0594	18.0848	18.1102	18.1356	18.1610	18.1864	18.2118	18.2372	18.2626
0.720	18.2880	18.3134	18.3388	18.3642	18.3896	18.4150	18.4404	18.4658	18.4912	19.5166
0.730	18.5420	18.5674	18.5928	18.6182	18.6436	18.6690	18.6944	18.7198	18.7452	18.7706
0.740	18.7960	18.8214	18.8468	18.8722	18.8976	18.9230	18.9484	18.9738	18.9992	19.0246
0.750	19.0500	19.0754	19.1008	19.1262	19.1516	19.1170	19.2024	19.2278	19.2532	19.2786
0.760	19.3040	19.3294	19.3548	19.3802	19.4056	19.4310	19.4564	19.4818	19.5072	19.5326
0.770	19.5580	19.5834	19.6088	19.6342	19.6596	19.6850	19.7104	19.7358	19.7612	19.7886
0.780	19.8120	19.8374	19.8628	19.8882	19.9136	19.9390	19.9644	19.9898	20.0152	20.0406
0.790 0.800	20.0660 20.3200	20.0914 20.3454	20.1168 20.3708	20.1422 20.3962	20.1676 20.4216	20.1930 20.4470	20.2184 20.4724	20.2438 20.4978	20.2692 20.5232	20.2946 20.5486
0.810	20.5740	20.5994	20.6248	20.6502	20.6756	20.7010	20.7264	20.7518	20.7772	20.8026
0.820	20.3740	20.3534	20.0240	20.0302	20.0730	20.7010	20.7204	21.0058	21.0312	21.0566
0.830	21.0820	21.1074	21.1328	21.1582	21.1836	21.2090	21.2344	21.2598	21.2852	21.3106
0.840	21.3360	21.3614	21.3868	21.4122	21.4376	21.4630	21.4884	21.5138	21.5392	21.5646
0.850	21.5900	21.6154	21.6408	21.6662	21.6916	21.7170	21.7424	21.7678	21.7932	21.8186
0.860	21.8440	21.8694	21.8948	21.9202	21.9456	21.9710	21.9964	22.0218	22.0472	22.0726
0.870	22.0980	22.1234	22.1488	22.1742	22.1996	22.2250	22.2504	22.2758	22.3012	22.3266
0.880	22.3520	22.3774	22.4028	22.4282	22.4536	22.4790	22.5044	22.5298	22.5552	22.5806
0.890	22.6060	22.6314	22.6568	22.6822	22.7076	22.7330	22.7584	22.7838	22.8092	22.8346
0.900	22.8600	22.8854	22.9108	22.9362	22.9616	22.9870	23.0124	23.0378	23.0632	23.0886
0.910	23.1140	23.1394	23.1648	23.1902	23.2156	23.2410	23.2664	23.2918	23.3172	23.3426
0.920	23.3680	23.3934	23.4188	23.4442	23.4696	23.4950	23.5204	23.5458	23.5712	23.5966
0.930	23.6220	23.6474	23.6728	23.6982	23.7236	23.7490	23.7744	23.7998	23.8252	23.8506
0.940	23.8760	23.9014	23.9268	23.9522	23.9776	24.0030	24.0284	24.0538	24.0792	24.1046
0.950	24.1300	24.1554	24.1808	24.2062	24.2316	24.2570	24.2824	24.3078	24.3332	24.3586
0.960	24.3840	24.4094	24.4348	24.4602	24.4856	24.5110	24.5364	24.5618	24.5812	24.6126
0.970	24.6380	24.6634	24.6888	24.7142	24.7396	24.7650	24.7904	24.8158	24.8412	24.8666
0.980	24.8920	24.9174	24.9428	24.9682	24.9936	25.0190	25.0444	25.0698	25.0952	25.1206
0.990	25.1460	25.1714	25.1968	25.2222	25.2476	25.2730	25.2984	25.3228	25.3492	25.3746
1.000	25.4000									
Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009

TYCO ELECTRONICS GLOBAL AUTOMOTIVE DIVISION



Page

16	✓
17	✓
18	✓
19	✓
20	✓
21	✓
22	√
23	1
24	
	1
	Tyco Electronics
	17 18 19 20 21 22









✓	✓	√	√
√ √ √			
\frac{1}{\sqrt{1}}	<i>J J</i>	<i>J J</i>	



Introduction













Tyco Electronics has developed the AMP SUPERSEAL 1.5 SERIES Connector family to meet the increasing requirements for reliability and water proofness.

AMP SUPERSEAL 1.5 SERIES Connector exceed the requirements prescribed by IP 67 according IEC 60529 and DIN 40050-9 standards and has its application in the automotive, agriculture and industrial machinery. For sensor application the AMP SUPERSEAL 1.5 SERIES Connector system is qualified as well.

Advantages

- Compact system minimizes packaging requirements
- Sealing reliability proven under harsh conditions
- Designed for ease of manual harness assembly, engine mounting and under hood environments

Applications

- Wire-to-Wire (1.5 mm) and ECU applications, under hood or any location where sealing is required
- Suitable for automotive, truck, bus, or off-road vehicles



Receptacle Contacts

Technical Features

Contact Material:

CuZn (Tab)

CuSn (Receptacle)

Contact Finish:

tin plated

Current Carrying Capacity:

14 A max.

Wire Size Range:

 $0.35 - 2.5 \text{ mm}^2$

Insulation Diameter:

1.2-3.3 mm FLR

Extraction Tool:


Part No. 9-1579007-1

Product Specification:

108-20090

Application Specification:

114-20045

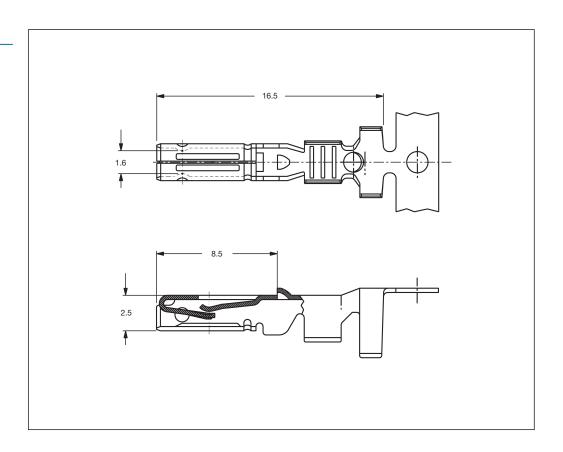

1.5 mm Receptacle Contacts

Wire Size	Insulation		Material			Part N	lumbers		
Range (mm²)	FLK	FLR	and Finish	Strip Form	Package Quantity	Loose- Piece	Package Quantity	Applicator	Hand Tool
0.35-0.50	1.45–2.20	1.2-1.6	CuSn, tin plated	282403-1	14,000	183035-1	5,000	1528347-1	58583-1
0.75–1.50	2.40–3.35	1.7–2.4	CuSn, tin plated	282110-1	14,000	183025-1	5,000	1528018-1	58583-1
1.5–2.5	3.15–3.80	2.2–3.3	CuSn, tin plated	282466-1	14,000	-	-	1426361-1	-

 $\ensuremath{\text{\textbf{Note:}}}$ All part numbers are RoHS and ELV compliant.

Tab Contacts

Technical Features

Contact Material: CuZn (Tab)

CuSn (Receptacle)

Contact Finish:

tin plated, gold plated

Current Carrying Capacity:

14 A max.

Wire Size Range:

 $0.35 - 2.5 \text{ mm}^2$

Insulation Diameter:

1.2-3.3 mm FLR

Extraction Tool:


Part No. 9-1579007-1

Product Specification:

108-20090

Application Specification:

114-20045

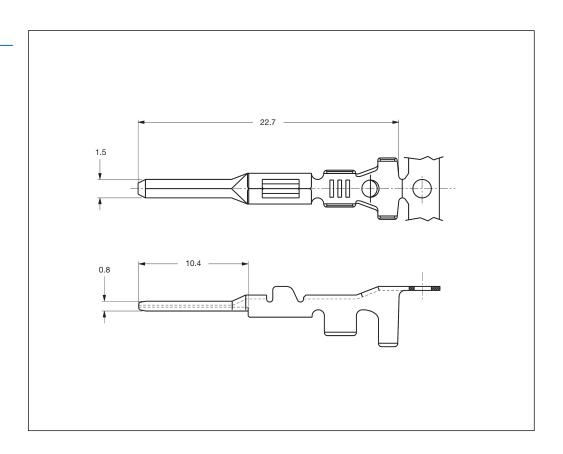

1.5 mm Tab Contacts


Wire Size	Insulation		Material			Part N	lumbers		
Range (mm²)	(mm) FLK FLR		and Finish	Strip Form	Package Quantity	Loose- Piece	Package Quantity	Applicator	Hand Tool
0.35-0.50	1.45–2.20	1.2–1.6	CuZn, tin plated	282404-1	16,000	183036-1	5,000	1528199-1	58583-1
0.35-0.50	1.45-2.20		CuZn, gold plated	282404-3	16,000	-	-	1320199-1	30303-1
0.75–1.50	2.40–3.35	1.7–2.4	CuZn, tin plated	282109-1	16,000	183024-1	5,000	- 1528463-1	58583-1
0.75-1.50	2.40-3.33	1.7-2.4	CuZn, gold plated	282109-3	16,000	-	-		36363-1
1.5–2.5	3.15–3.80	2.2–3.3	CuZn, tin plated	282465-1	16,000	-	-	1528200-1	-

Note: All part numbers are RoHS and ELV compliant.

Single Wire Seals and Cavity Plugs

Technical Features

- Made from silicon rubber material
- For insulation diameters of 1.2−3.3 mm
- Loose-piece wire seals are crimped simultaneously with the contacts

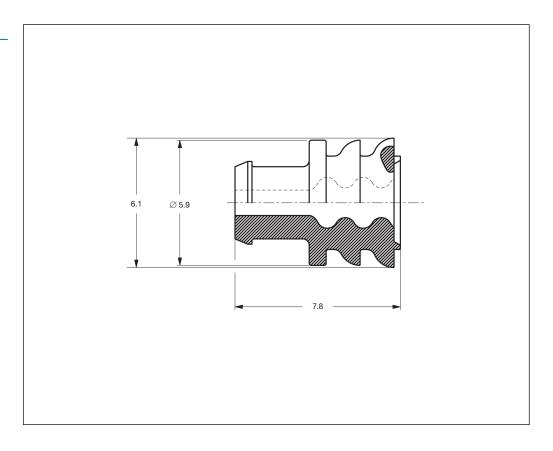

Single Wire Seals and Cavity Plug

	n Diameter nm)	Color	Part Number	Package	
FLK	FLR			Quantity	
_	1.2–1.6	Green	281934-4	50,000	
_	1.7–2.4	Yellow	281934-2	50,000	
_	2.5–3.3	Red	281934-3	50,000	
Cavi	ty Plug	Red	282081-1	50,000	

Plug Housings

Plug Housings

Utilizes Receptacle Contacts

Technical Features

Housing Material:

Polyamide 6.6 glass-filled

Color:

Black (other colors available)

Secondary Lock:

Polyamide 6.6 glass-filled


Color: Red

Sealing:

Silicon Rubber

Color:

Yellow

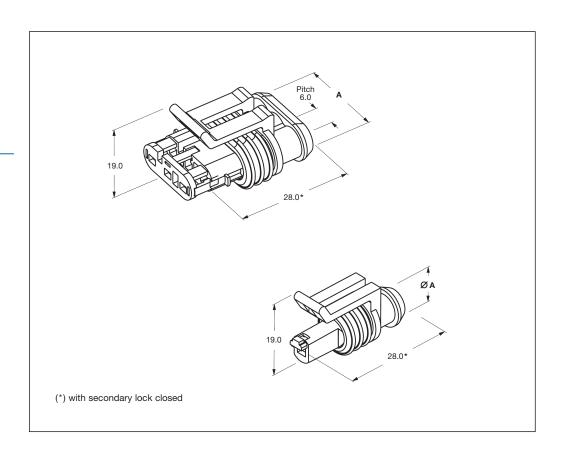

Plug Housings

No. of	Dimension A	Part Number	Package
Positions	(mm)		Quantity
1	9.3	282079-2	3,000
2	15.3	282080-1	1,600
3	21.3	282087-1	1,300
4	27.3	282088-1	1,000
5	33.3	282089-1	500
6	39.3	282090-1	400

Cap Housings

Cap Housings

Utilizes Tab Contacts

Also suitable for panel mount application (see detail "X")

Technical Features

Housing Material:

Polyamide 6.6 glass-filled

Color:

Black (other colors available)

Secondary Lock:

Polyamide 6.6 glass-filled

Color:


Red

Extraction Tool for Secondary Lock of Cap Housing:

Part No. 785084-1

Insertion Tool for Secondary Lock of Cap Housing: Part No. 785061-1 for 1 and 2 positions

Part No. **785061-2** for 3–6 positions

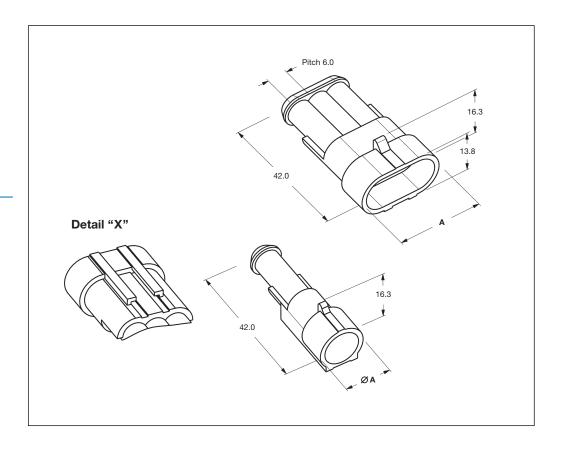

Cap Housings


No. of Positions	Dimension A	Part Number	Package	
Positions	(mm)		Quantity	
1	13.8	282103-1	2,200	
2	19.8	282104-1	1,500	
3	25.8	282105-1	1,200	
4	31.8	282106-1	500	
5	37.8	282107-1	700	
6	43.8	282108-1	550	



Rubber Boots

Rubber Boots

Connector Housing Part Number	Description	No. of Positions	Rubber Boot Part Number	Color	Package Quantity
282080-1	Plug Housing	2	880810-1	Black	1.500
282104-1	Cap Housing	2	000010-1	DIACK	1,500
282087-1	Plug Housing	3	880811-2	Black	1.000
282105-1	Cap Housing	3	000011-2	DIACK	1,000
282089-1	Plug Housing	5	880814-1	Black	100
282107-1	Cap Housing	3	000014-1	DiaCK	100

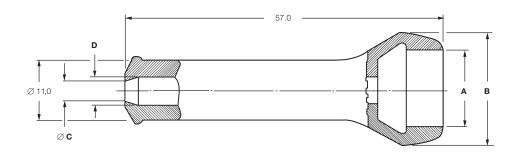

Dimensional Data

Boot Part Number	No. of Wires	Dimensions (mm)			
		Α	В	С	D
880810-1	2	12.5	20.5	4.6	5.0
880811-2	3	17.5	25.5	4.6	5.0
493581-1*	4	21.0	34.5	_	7.0
880814-1	5	27.5	35.0	6.5	7.0

^{*)} Different Style, see customer drawing



Introduction













Application Tooling from Tyco Electronics is designed to perform perfect terminations, time after time. This results in productivity gains, yielding more terminations for less money at the time of application, and in service.

It is this combination of superior quality at a lower installed end cost that distinguishes the Tyco Electronics system solution.

Because production requirements vary, GATD – Global Application Tooling Division – can provide various levels of tooling to meet the full spectrum of output requirements. The continuous support by our field service completes the Tyco Electronics system. Our field service engineers ensure the application equipment fulfil all requirements at any given time.

Please use the tooling website and the online search to find the tooling that best suits your application.

Put your terminal part number either into the hand tool or applicator database and the appropriate tool will be shown.

If you can't find what you are looking for, it does not necessarily mean that there is nothing available for your application:

For cross-referencing information – contact one of our Product Information Centers (PIC), listed in the selection from the left-hand menu box.

For more complex equipment and technical help – find your country contact by selecting from the left-hand menu box or contact your Tyco Electronics representative.



Numerical Index

Part Number	Page
58583-1	17, 18
183024-1	18
183025-1	17
183035-1	17
183036-1	18
281934-2	19
281934-3	19
281934-4	19
282079-2	20
282080-1	20, 22
282081-1	19
282087-1	20, 22
282088-1	20
282089-1	20, 22
282090-1	20

Page
21
21, 22
21, 22
21
21, 22
21
18
18
17
17
18
18
18
17
22

Part Number	Page
547203-1	9
785061-1	21
785061-2	21
785084-1	21
880810-1	22
880811-2	22
880814-1	22
1426361-1	17
1528018-1	17
1528199-1	18
1528200-1	18
1528347-1	17
1528463-1	18
9-1579007-1	17, 18





Americas

Argentina - Buenos Aires Phone: +54-11-4733-2200 Fax: +54-11-4733-2211

Brasil - São Paulo Phone: +55-11-2103-6105 Fax: +55-11-2103-6204 Canada - TorontoPhone:+1-905-475-6222Fax:+1-905-474-5520ProductInformation Center:Phone:+1-905-470-4425Fax:+1-905-474-5525

Colombia - Bogota Phone: +57-1-231-9398 Fax: +57-1-660-0206

 Mexico - Mexico City

 Phone: +52-55-1106-0800

 +01-800-733-8926

 Fax: +52-55-1106-0901

For Latin/South American Countries not shown

Phone: +54-11-4733-2015 Fax: +54-11-4733-2083

an

Troy, MI Phone: +1-248-273-3359 Fax: +1-248-273-3322

Phone: +1-717-564-0100

Phone: +1-800-522-6752

+1-717-986-7575

+1-717-986-7575

Product Information Center:

Asia/Pacific

 Australia - Sydney

 Phone: +61-2-9554-2600

 Fax: +61-2-9502-2556

 Product Information Center:

 Phone: +61-2-9840-8200

 Fax: +61-2-9634-6188

India - Bangalore Phone: +91-80-285-40800 Fax: +91-80-285-40820

Indonesia – Jakarta Phone: +65-6482-0311 Fax: +65-6482-1012 Japan - Kawasaki, Kanagawa Phone: +81-44-844-8111 Fax: +81-44-812-3207 Product Information Center: Phone: +81-44-844-8013 Fax: +81-44-812-3200

Korea - Seoul Phone: +82-2-3415-4500 Fax: +82-2-3486-3810

Malaysia - Selangor Phone: +60-3-7805-3055 Fax: +60-3-7805-3066 **New Zealand** - Auckland Phone: +64-9-634-4580 Fax: +64-9-634-4586

Philippines - Makati City Phone: +632-848-0171 Fax: +632-867-8661

People's Republic of China

Hong Kong Phone: +852-2735-1628

Fax: +852-2735-0243

Shanghai

Phone: +86-21-2407-1588 Fax: +86-21-2407-1599 **Singapore** - Singapore Phone: +65-6482-0311 Fax: +65-6482-1012

Taiwan - Taipei

United States

Harrisburg, PA

Fax:

Phone: +886-2-8768-2788 Fax: +886-2-8768-2268

Thailand - Bangkok Phone: +66-2-955-0500 Fax: +66-2-955-0505

Vietnam - Ho Chi Minh City Phone: +84-8-930-5546 Fax: +84-8-930-3443

Europe/Middle East/Africa

Austria - Vienna Phone: +43-1-905-60-0 Fax: +43-1-905-60-1333 Product Information Center: Phone: +43-1-905-60-1249 Fax: +43-1-905-60-1251

Phone: +375-17-237-47-94 Fax: +375-17-237-47-94

Belarus - Minsk

Belgium - Kessel-Lo Phone: +32-16-352-300 Fax: +32-16-352-352

Bulgaria - Sofia Phone: +359-2-971-2152 Fax: +359-2-971-2153

Czech Republic and Slovakia Czech Republic - Kurim

Phone: +420-541-162-111 Fax: +420-541-162-223 Product Information Center: Phone: +420-541-162-113 Fax: +420-541-162-132

Denmark - Glostrup Phone: +45-43-48-04-00 Fax: +45-43-44-14-14

Egypt - Cairo Phone: +202-419-2334 Fax: +202-417-7647

Estonia - Tartu Phone: +372-5138-274 Fax: +372-7400-779

Finland - Helsinki Phone: +358-95-12-34-20 Fax: +358-95-12-34-250 France - Cergy-Pontoise Cedex Phone: +33-1-3420-8888 Fax: +33-1-3420-8600 Product Information Center: Phone: +33-1-3420-8686 Fax: +33-1-3420-8623

France Export Divisions -Cergy-Pontoise Cedex Phone: +33-1-3420-8866 Fax: +33-1-3420-8300

Germany - Bensheim Phone: +49-6251-133-0 Fax: +49-6251-133-1600 Product Information Center: Phone: +49-6251-133-1999 Fax: +49-6251-133-1988

Greece - Athens Phone: +30-210-9370-396/397

Fax: +30-210-9370-655 **Hungary** - Budapest
Phone: +36-1-289-1000
Fax: +36-1-289-1010
Product Information Center:

Phone: +36-1-289-1016 Fax: +36-1-289-1017

Ireland - Dublin Phone: +353-1-866-5612 Fax: +353-1-866-5714

Israel - Petach-Tikva Phone: +972-3-929-0999 Fax: +972-3-919-1088

Italy - Collegno (Torino) Phone: +39-011-4012-111 Fax: +39-011-4031-116 Product Information Center: Phone: +39-011-4012-428 Fax: +39-011-40-287-428 Lithuania and Latvia Lithuania - Vilnius

Phone: +370-5-213-1402
Fax: +370-5-213-1403
Product Information Center:
Phone: +370-5-211-3016
Fax: +370-5-213-1403

Netherlands - 's-Hertogenbosch Phone: +31-73-6246-246 Fax: +31-73-6212-365 Product Information Center: Phone: +31-73-6246-999 Fax: +31-73-6246-998

Norway - Nesbru Phone: +47-66-77-88-50 Fax: +47-66-77-88-55

Poland - Warsaw Phone: +48-22-4576-700 Fax: +48-22-4576-720 Product Information Center: Phone: +48-22-4576-704 Fax: +48-22-4576-720

Romania - Bucharest Phone: +40-21-311-3479/3596 Fax: +40-21-312-0574

Russia - Moscow Phone: +7-495-790-7902 Fax: +7-495-721-1893 Product Information Center: Phone: +7-495-790-7902-503 Fax: +7-495-721-1893

Russia - St. Petersburg Phone: +7-812-718-8192 Fax: +7-812-718-8193

Slovenia - Ljubljana Phone: +386-1561-3270 Fax: +386-1561-3240 **South Africa** - Port Elizabeth Phone: +27-41-503-4500 Fax: +27-41-581-0440

Spain - Barcelona Phone: +34-93-291-0330 Fax: +34-93-201-7879

Sweden - Upplands Väsby Phone: +46-8-50-72-50-00 Fax: +46-8-50-72-50-01

Switzerland - Steinach Phone: +41-71-447-0447 Fax: +41-71-447-0444

Turkey - Istanbul

Phone: +90-212-281-8181-83 +90-212-282-5130/5430

Fax: +90-212-281-8184

Ukraine - Kiev

Phone: +380-44-206-2265 Fax: +380-44-206-2264 Product Information Center: Phone: +380-44-206-2265 Fax: +380-44-206-2264

United Kingdom -

Stanmore, Middlesex Phone: +44-8706-080208 Fax: +44-208-954-6234 Product Information Center: Freephone (UK only):

0800-267-666 Phone: +44-8706-080208 Fax: +44-208-420-8095



Tyco Electronics AMP GmbH

AMPèrestr. 12-14

64625 Bensheim / Germany Phone: +49-(0)6251-133-0 Fax: +49-(0)6251-133-1600

www.tycoelectronics.com AMP, AMP SUPERSEAL 1.5 SERIES, TE Logo and Tyco Electronics are trademarks

Tyco Electronics AMP GmbH certified acc. ISO 14001 and ISO/TS 16949:2002

© 2008 Tyco Electronics Ltd. 1654292-2 Revised 6-2008 3M ST