

ORDER INFORMATION




P H 1 S 2 5 - 1 X X X X A/B - L

◎:Standard Recommend

No. of contacts per row (02-50)	◎:Gold Flash GA:50" GB:10U" GC:20U" GD:30U" TE:Tin 200U"	S:Selective SA:5U" SB:10U" SC:20U" SD:30U"	◎:Black Insulator W:White Insulator G:NYlon natural	Fill in Dimension For Special Design	L:RoHS + P.B.T
---------------------------------	---	--	---	--------------------------------------	----------------



SPECIFICATION
 Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to +105 °C
MATERIAL
 Insulator:Polyester, UL 94V-0◎Standard:P.B.T
 Contact Pin:Copper Alloy
 Tin,Gold plated◎Standard:Gold flash all over

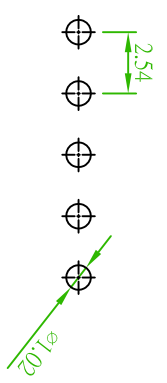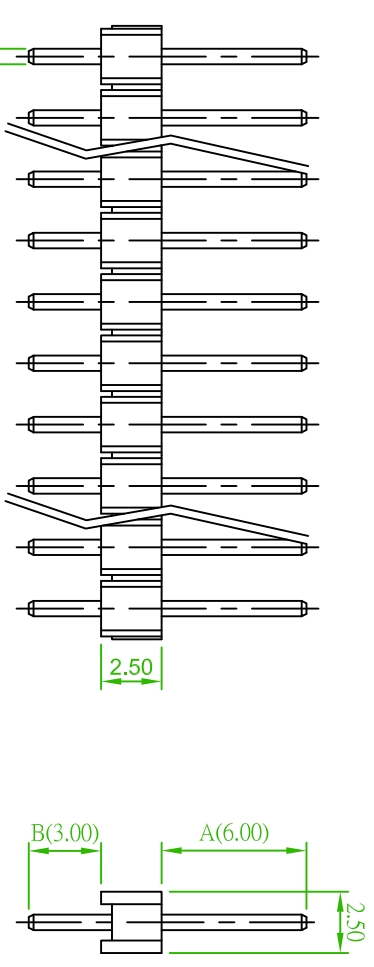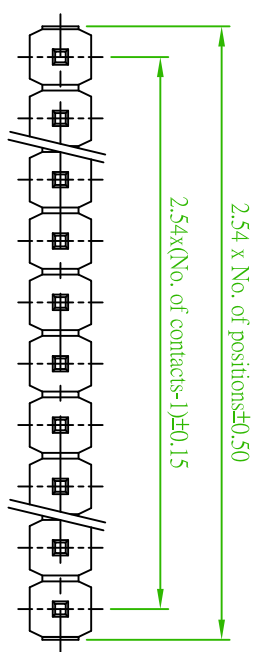

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

AREA	REV.	DESCRIPTION	DATE
①	B	Add Break line	2008/09/30

		耀德企業有限公司 Amitek Technology Co., Ltd. TEL:886-2-268-8836 FAX:886-2-268-8835	
品名	TITLE	PIN HEADER 2.54mm STRAIGHT TYPE	
品號	PART NO.	PH1S25-1XX-L	
圖號	DRAWING NO.	PH1S25-1XX-L	
客戶品號	CUSTOMER P/N	.X ±0.35	
公差	TOLERANCE	.XX ±0.25	
版本	REV.	B	繪圖
比例	SCALE	FREE	核對
單位	UNIT	mm	核對
日期	DATE	2005/08/02	繪圖
核對	CHECKED	Paul	核對
核准	APPROVED	James	核准