

Morsetti per C.S.

carrello


A1 Terminal blocks for P.C.B.





rising clamp

Blocs de jonction C.I.
étrier remontant

Printklemmen
Liftprinzip

Passo Pas	Pitch Rastermaß	mm
Tensione nominale Tension nominale	Rated Voltage Bemessungsspannung	V
Corrente nominale Intensité nominale	Rated Current Bemessungsstrom	A

Tipo cavi Type du conducteur	Types of cables Leitungstypen	
Sezione nominale Section nominale	Nominal cross section Nennquerschnitt	mm² AWG
Lunghezza spelatura Longueur de dénudage	Stripping length Abisolierlänge	mm
Coppia di torsione Couple de serrage	Torque Drehmoment	Nm Lb-in
Temperatura Température	Temperature Temperatur	°C
Corpo isolante Corps isolant	Housing Isolierkörper	
Vite imperdibile Vis imperdable	Captive screw Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	UL	UL1059
	cUL	UL1059 + C22.2 n°158

Poli Pôles	Poles Polzahl	X →
Colore standard Coloris standard	Standard colour Standardfarbe	Y →
Altri dati Autres données	Other information Weitere Informationen	pag. Seite

Ordinazione Référence de commande		How to order Bestellschlüssel			
MRT18	P5,08 / X	V06	Y	...	
 Tipo	 Passo	 Poli	 Versione	 Colori	 Numerazione
 Type	 Pitch	 Poles	 Version	 Colors	 Printing
 Type	 Pas	 Pôles	 Version	 Couleurs	 Marquage
 Typ	 Rastermaß	 Polzahl	 Version	 Farben	 Bedruckung

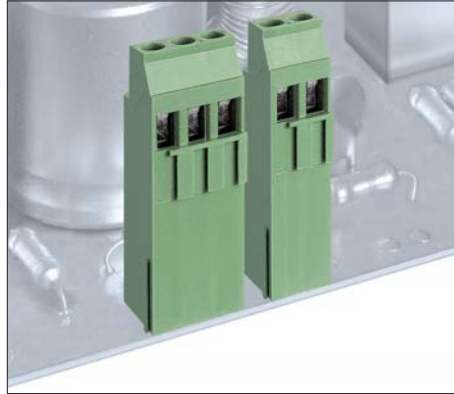
Altri colori a richiesta. **Other colours on demand.**
Autres couleurs sur demande. Andere Farben bei Bedarf.







MRT18..V06 MRT18..V07 MRT18..V08

Modulo componibile **Interlocking modules**
Elements modulaires Zusammensteckbare Blöcke

Poli **Poles** **2/3** (5,08)
Pôles **Polzahl** **1/2** (10,16)

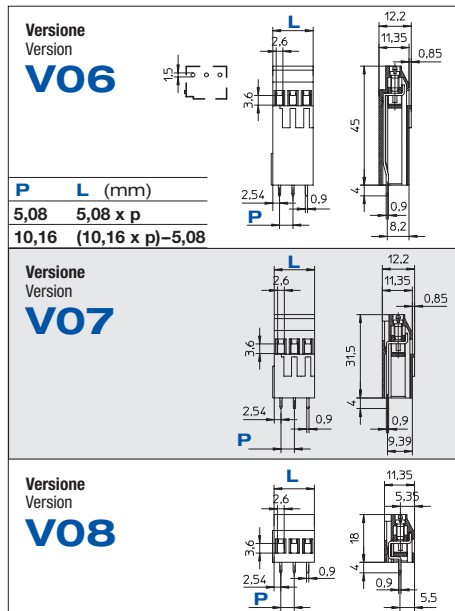


5,08	10,16
320	630
20	

		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
450 (5,08) 750 (10,16)	20	0,5 ÷ 2,5
450 (5,08) 750 (10,16)	20	0,5 ÷ 2,5
300 (5,08 and 10,16)	20	30 ÷ 12

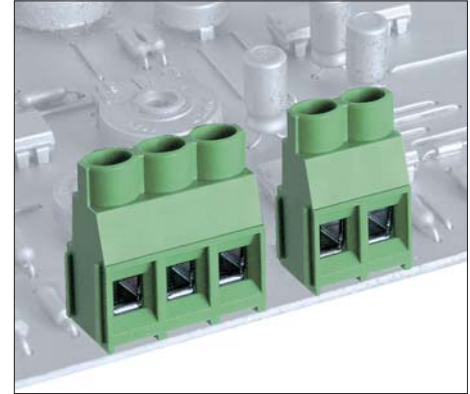
min 2 - max ...		
VE		
75		








MRT20

Modulo componibile **Interlocking modules**
Elements modulaires Zusammensteckbare Blöcke

Poli **Poles** **2/3**
Pôles **Polzahl**



6,35	9,52
400	630
32	

		
0,2 ÷ 6 30 ÷ 10	0,2 ÷ 6 30 ÷ 10	0,2 ÷ 6 30 ÷ 10
8		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,8 x 5	and
		
		PZ1

V	A	mm²/AWG
450 (6,35) 750 (9,52)	32	0,5 ÷ 4
450 (6,35) 750 (9,52)	32	0,5 ÷ 4
300 (6,35 and 9,52)	24	30 ÷ 10

min 2 - max ...		
VE		
75		

