

MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet

# tasker® C142 2x0,08 + 2x0,25 mm<sup>2</sup>

### Special Video Flat Divisible Cable

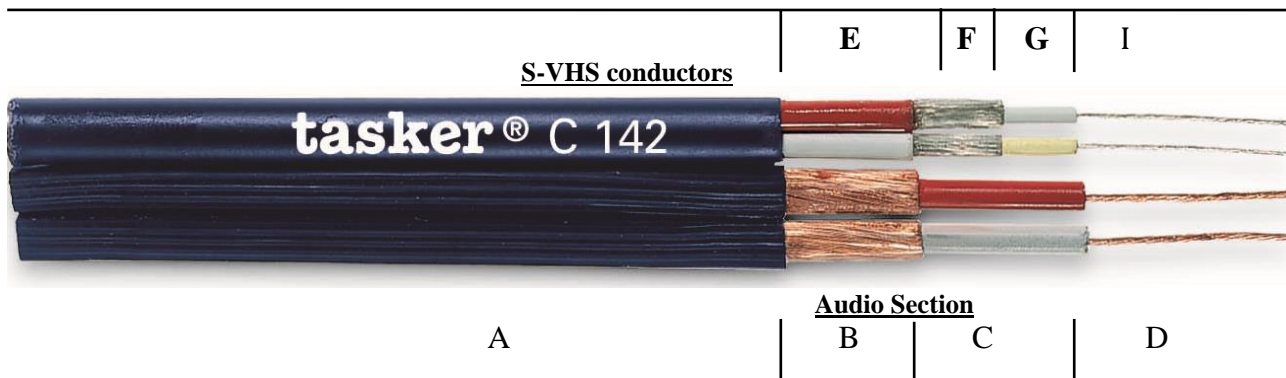

**CATEGORY** Video + Audio Cables (See Video Catalogue)  
**APPLICATIONS** Video and Audio Stereo assembly

**A:** Night Blue Soft **PVC** Sheath.  
 Outer Dimension: 5,00x14,50 (±0,20) mm.

**Audio Section:**

**B:** Spiral shielding in of O.F.C. red copper, covering 100%.  
**C:** Insulations in compact PE, colored one red and one white.  
 Diam. Ø 2,30 (±0,20) mm.  
**D:** Stranded O.F.C. red copper formation 8x0,20 mm.  
 Nom. Cross section 2x0,25 mm<sup>2</sup>.

**S-VHS Section:**

**E:** Inner sheath in PVC, colored one red and one white.  
 Outer diam. Ø 2,00 (±0,20) mm.  
**F:** Spiral shielding in of O.F.C. tinned copper, covering 100%.  
**G:** Insulation in PVC, colored one white and one yellow.  
 Diam. Ø 1,00 (±0,20) mm.  
**H:** Stranded O.F.C. tinned copper formation 12x0,10 mm.  
 Nom. Cross section 2x0,08 mm<sup>2</sup>

**MARKING** **tasker®** C 142 2x0,08 + 2x0,25 mm<sup>2</sup> Professional High-Definition S-VHS Video and Audio cable Made in Italy

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE** or **PUR**.

Audio Section Properties

<b>Conductor Resistance</b>	75,85 Ω/Km
<b>Capacity Core/Core</b>	36 pF/m
<b>Capacity Core/Shield</b>	96 pF/m

Video properties

<b>Conductor Resistance</b>	203 Ω/Km
<b>Impedence</b>	75 Ω
<b>Capacity Core/Core</b>	65 pF/m
<b>Capacity Core/Shield</b>	230 pF/m

General Properties:

<b>Max rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

Section View



<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 26.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			