

# DH-PFM940

## RG59 Coaxial Cable with Power Cable





### Specifications

<b>Model</b>		<b>DH-PFM940</b>
<b>RG59 Coaxial cable</b>		
Conductor	Material	Bare copper
	Wire gauge	20AWG, 0.81mm
Insulation	Material	FPE
	Min. average thickness	1.45±0.05mm
	Diameter	3.7mm
Tape	Material	15mm width shielding aluminum foil
	Thickness	0.04mm
Braid	Braiding Material	Bare copper
	Monofilament diameter	0.12mm*128(16*8)
	Braiding density	95%
Jacket	Material	PVC(65P)
	Min. average thickness	1.0mm
	Diameter	6.1mm
	Color	Black
Impedance		75Ω
Mark spacing		1000mm
<b>Power cable</b>		
Conductor(*2)	Material	Bare copper
	Diameter	7*0.385mm
Insulation	Material	HDPE
	Color	Red/black

# DH-PFM940

	Diameter	1.8mm
Jacket	Material	PVC(65P)
	Min. average thickness	0.6mm
	Diameter	3.2mm
	Color	Black
<b>General</b>		
Length		100m
Carried standard		MIL-C-17F
Working temperature		-40° ~ +80°
Storage temperature		-20° ~ +70°
Weight		7.5Kg
Weight(with packaging)		8.0Kg
Packaging dimension		315*315*125mm(with blister packaging)

## Dimensions (mm)

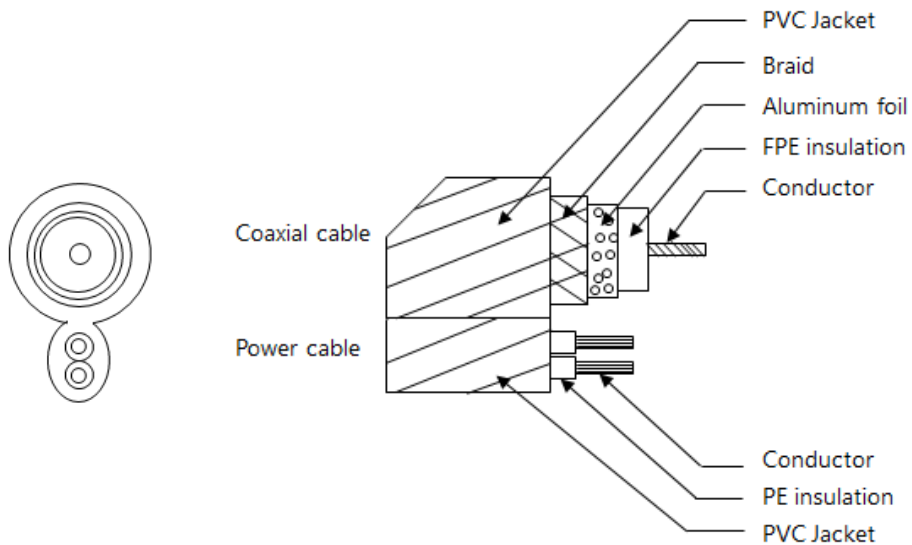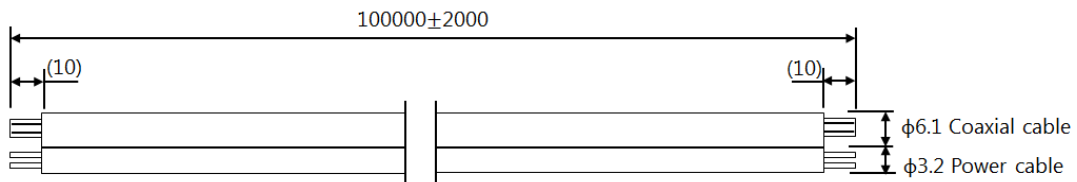

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

\*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.